



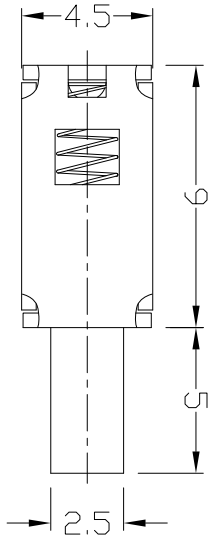


DIMENSIONS

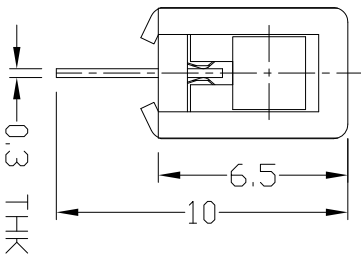

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

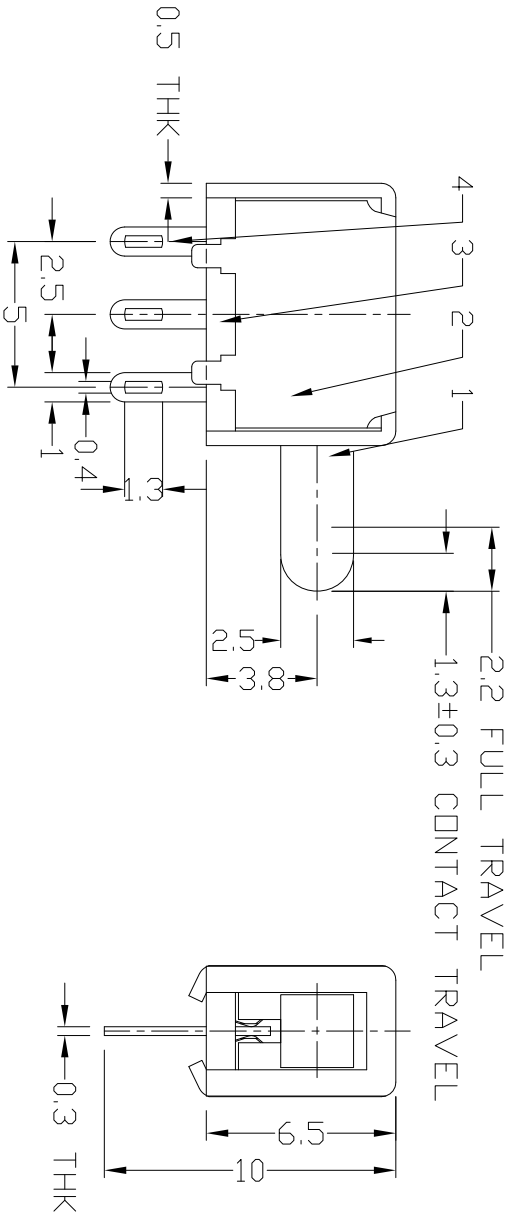

ELECTRD-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	DC50V 0.3A
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
OPERATING MODE	NON-LOCK
STROKE	FULL 2.2mm CONTACT 1.3±0.3
OPERATING FORCE	70±20gf
OPERATING LIFE(cycles)	10,000

8																			
7																			
6	SPRING	STEEL WIRE	1	NATURAL	WITHIN 1.5mm±0.1mm	UNITS	mm												
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED	OVER 1.5mm±0.2mm	MAT'L	SEE NOTE												
4	TERMINAL	BRASS STRIP	3	Ag PLATED		FINISH	SEE NOTE												
3	BASE	PHENOLIC RESIN	1	NATURAL		Q'TY													
2	FRAME	STEEL STRIP	1	Ni PLATED															
1	KNOB	POM	1	BLACK															
ND.	PARTS	MATERIAL	Q'TY	FINISHING															

DONGGUAN MINGJU ELECTRONICS CO.,LTD

TITLE: PUSH SWITCH / HORIZONTAL
PART NO.: PS-12D01N

DR: *Stacy* 2015/03/30
CHKD: *Stacy* 2015/03/30
SCALE: 4:1
DWG NO.: PS-12D01N

APPD: *Stacy*
SCALE: 1/1
SHEET: 1/1
REV: A
CUSTOMER DRAWING

REV.	ECN.	NO.	APPL.