



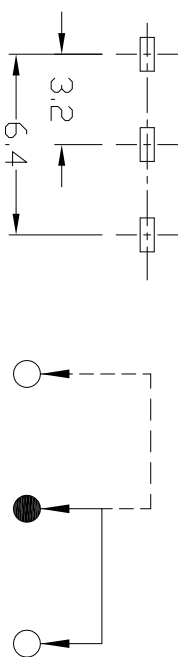


RoHS
Compliant
2002/95/EC

DIMENSIONS

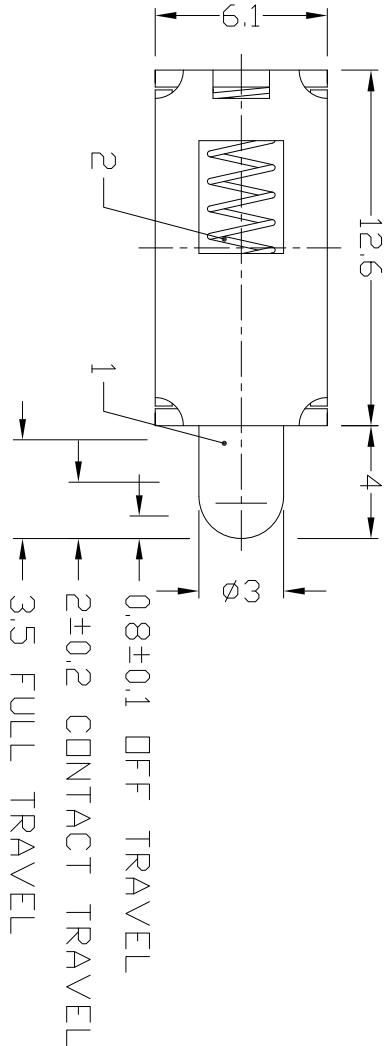

P.C.B LAYOUT
BOTTOM VIEW
CIRCUIT DIAGRAM

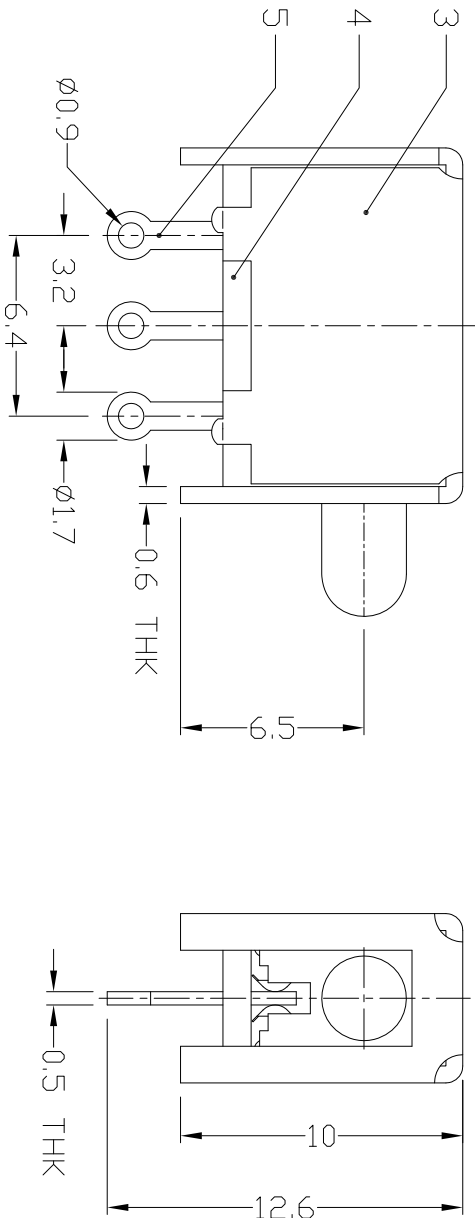

ELECTRD-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	DC50V 0.3A
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
OPERATING MODE	NON-LOCK
STROKE	OFF 0.8±0.1 FULL 3.5mm CONTACT 2±0.2
OPERATING FORCE	70±20gf
OPERATING LIFE(cycles)	10,000

8																			
7	CONTACT CLIP	PBS STRIP	1	Ag PLATED	WITHIN 1.5mm±0.1mm	UNITS	mm												
6	TERMINAL	BRASS STRIP	3	Ag PLATED	OVER 1.5mm±0.2mm	MAT'L	SEE NOTE												
5	BASE	PHENOLIC RESIN	1	NATURAL		FINISH	SEE NOTE												
4	FRAME	STEEL STRIP	1	Ni PLATED		DR:	Stucky 2015/03/30	DWG NO.:	PS-12F03-A-N										
3	SPRING	STEEL WIRE	1	NATURAL		CHK'D:	Stucky 2015/03/30	SCALE	1/1										
2	KNDB	POM	1	BLACK		APPD:		SHEET	A										
1	PARTS	MATERIAL	Q'TY	FINISHING				REV.											

DONGGUAN MINGJU ELECTRONICS CO.,LTD

TITLE: PUSH SWITCH / HORIZONTAL
PART NO.: AP-12F03-A-N

DR: Stucky 2015/03/30
CHK'D: Stucky 2015/03/30
SCALE: 1/1

REV. A
CUSTOMER DRAWING

REV.	ECN.	NO.	APPL.