



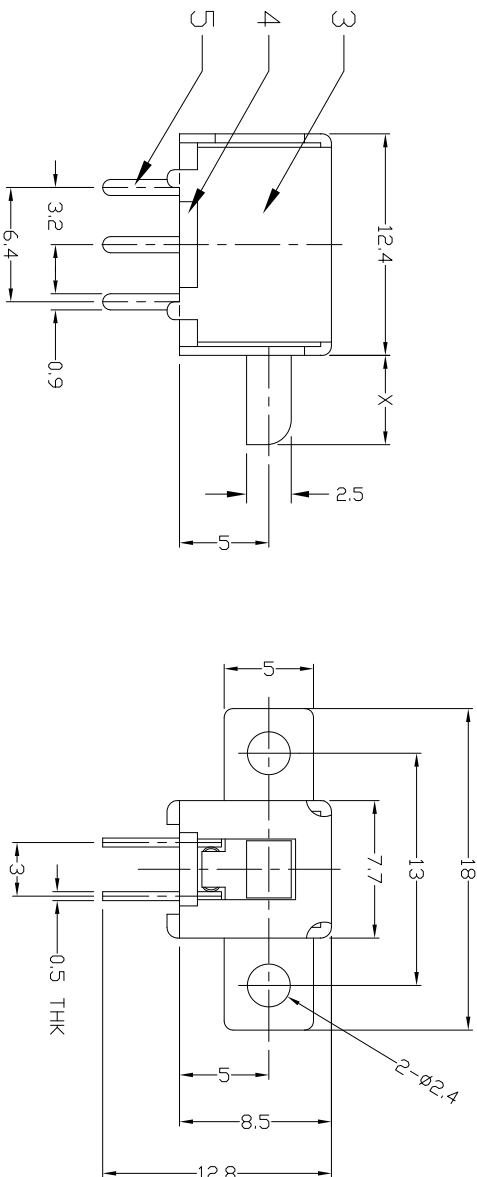


RoHS
Compliant
2002/95/EC


DIMENSIONS

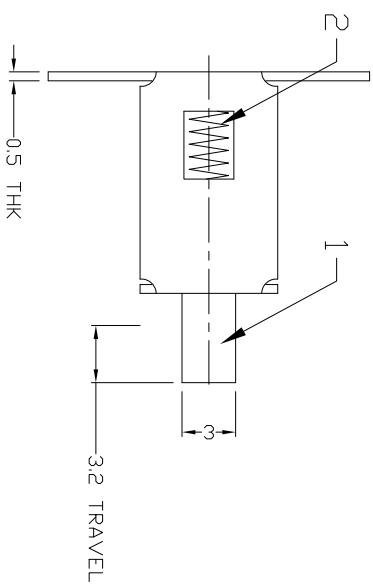

P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50V 0.3A
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
OPERATING MODE	NON-LOCK
STROKE	FULL 3.2mm
OPERATING FORCE	100±30gf
OPERATING LIFE(cycles)	10,000

8																			
7	CONTACT CLIP	PBS STRIP	2	AG PLATED	WITHIN 1.5mm±0.1mm	UNITS	mm												
6	TERMINAL	BRASS STRIP	6	AG PLATED	OVER 1.5mm±0.2mm	MAT'L	SEE NOTE												
5	BASE	PHENOLIC RESIN	1	NATURAL		FINISH	SEE NOTE												
4	FRAME	STEEL STRIP	1	NI PLATED		Q'TY													
3	SPRING	STEEL WIRE	1	NATURAL		Q'TY													
2	KNDB	POM	1	BLACK		APP'D:													
1	PARTS	MATERIAL		FINISHING															

DONGGUAN MINGJU ELECTRONICS CO.,LTD

TITLE: PUSH SWITCH / HORIZONTAL
PART NO.: PS-22F04N

DR: Steady 2015/03/31
CHKD: Steady 2015/03/31
DWG NO.: PS-22F04N

SCALE: 2:1
SHEET: 1/1
REV: A
CUSTOMER DRAWING

REV.	ECN.	NO.	APPD.