


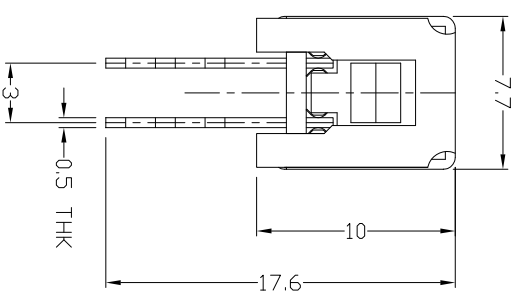


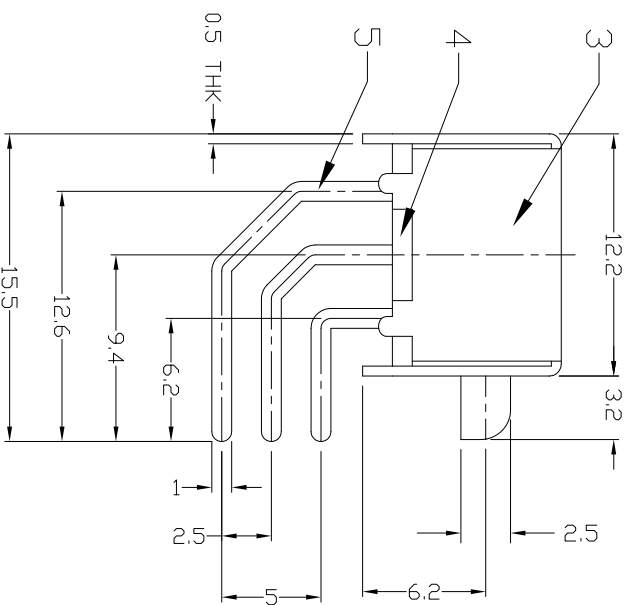


RoHS
Compliant
2002/95/EC

DIMENSIONS

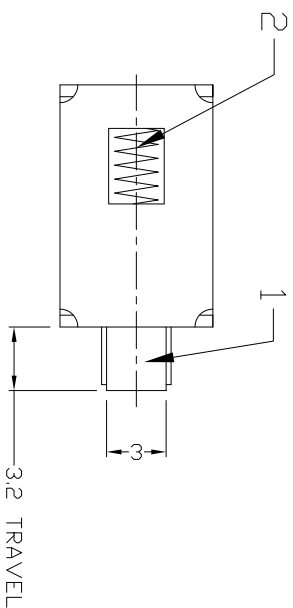

P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50V 0.3A
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
OPERATING MODE	NON-LOCK
STROKE	FULL 3.2mm
OPERATING FORCE	70±20gf
OPERATING LIFE(cycles)	10,000

8																			
7	CONTACT CLIP	PBS STRIP	2	Ag CLAD	WITHIN 1.5mm±0.1mm	UNITS	mm												
6	TERMINAL	BRASS STRIP	6	Ag PLATED	OVER 1.5mm±0.2mm	MAT'L	SEE NOTE												
5	BASE	PHENOLIC RESIN	1	NATURAL		FINISH	SEE NOTE												
4	FRAME	STEEL STRIP	1	Ni PLATED		Q'TY													
3	SPRING	STEEL WIRE	1	NATURAL		Q'TY													
2	KNDB	POM	1	BLACK		Q'TY													
1	PARTS	MATERIAL		FINISHING		APPD:													

DONGGUAN MINGJU ELECTRONICS CO.,LTD

TITLE: PUSH SWITCH / HORIZONTAL
PART NO: PS-22F92N

DR: 2015/04/02
CHKD: 2015/04/02
SCALE: 1/1

REV. ECN. NO. APPD.
PS-22F92N
CUSTOMER DRAWING