RoHS Compliant 2002/95/EC

Process Capable

REV.	ECN. NO.	APPD.

DIMENSIONS

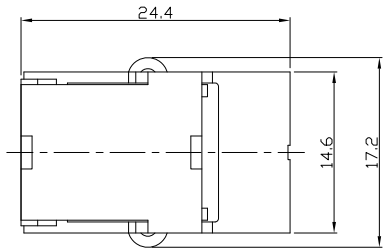

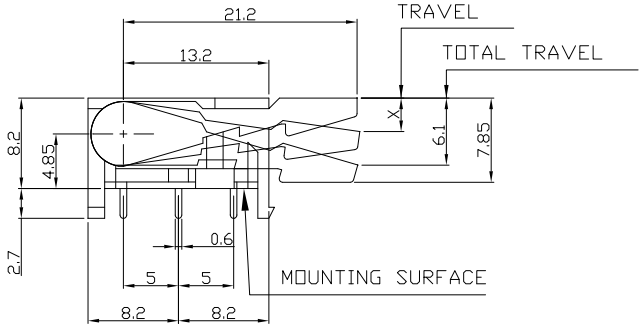

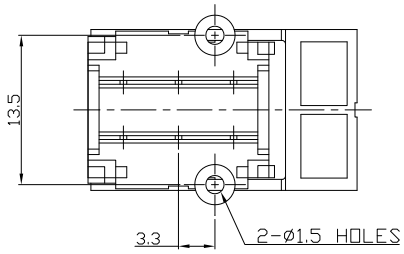

CIRCUIT DIAGRAM



TIME LAG DIAGRAM

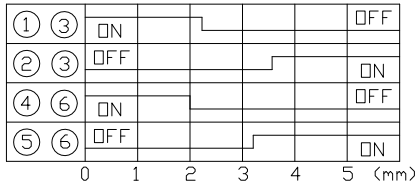

TRAVEL POSITION (X)

PRODUCT IMAGE





P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

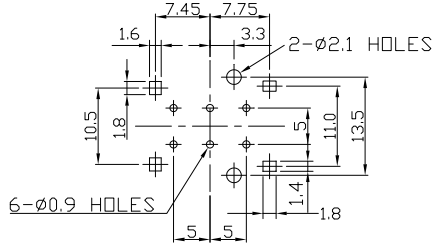

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 48V 0.2A
Contact Resistance	50mΩ Max.
Circuit	2C-2P
Operating Force	70gf Max.
Operating Life(cycles)	100,000

.X ±0.3	X. ±2°
UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

DONGGUAN MINGJU ELECTRONICS CO.,LTD

TITLE: HOOK SWITCH	PART NO.: AH-2240 SERIES
DR: Ricky 2014/04/02	DWG NO.: ASI-2240
CHKD: Ricky 2014/04/02	
APPD:	

SCALE	SHEET	REV.	
1:1	1/1	A	CUSTOMER DRAWING