






RoHS
Compliant
2002/95/EC

DIMENSIONS

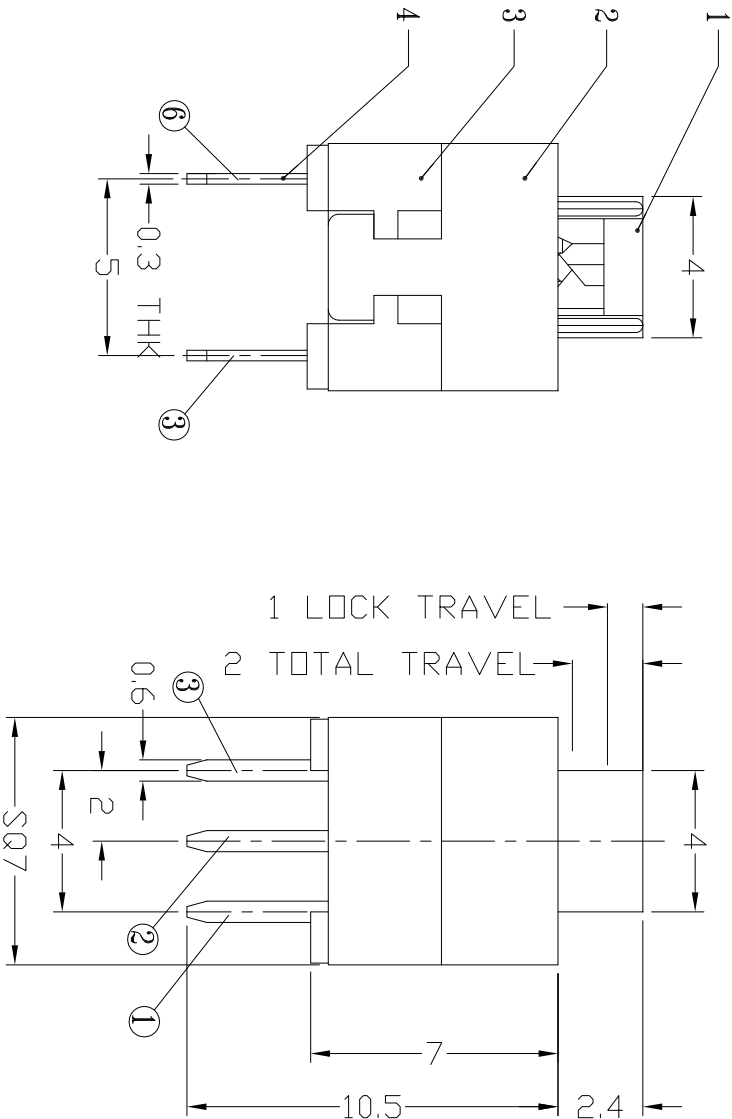

P.C.B LAYOUT
TOP VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC30V 0.1A	
CIRCUIT	2P2T	
CONTACT RESISTANCE	30mΩ MAX.	
TIMING	NDN-SHORTING	
OPERATING MODE	SELF-LDCK	AP-2212FLL
	NDN-LDCK	AP-2212FNL
STROKE	FULL 2.0mm	LCK 1.0mm
OPERATING FORCE	150±50gf	250±100gf
	OPERATING LIFE(cycles)	
		10,000

DONGGUAN MINGJU ELECTRONICS CO.,LTD

7	SPRING	SUS	1	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	mm
6	CONTACT CLIP	PBS C5210R-EH	2	Ag CLAD	OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE
5	CAM STICK	SUS	1	NATURAL		FINISH	SEE NOTE
4	TERMINAL	PBT+94V0+F.G./BRASS STRIP	2	BLACK/Ag PLATED OVER Ni PLATED		Q'TY	
3	CASE	PBT+94V0+F.G	1	BLACK		DR:	Stacy 2015/03/23
2	COVER	POM	1	WHITE		CHKD:	Stacy 2015/03/23
1	KNDB	POM	1	AS PER IPD		APPD:	
ND	PARTS	MATERIAL	QTY	FINISHING		SCALE	4:1
						SHEET	1/1
						REV.	A
						CUSTOMER	DRAWING

REV.	ECN.	NO.	APPD.