






RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	NO.	APPD.

DIMENSIONS

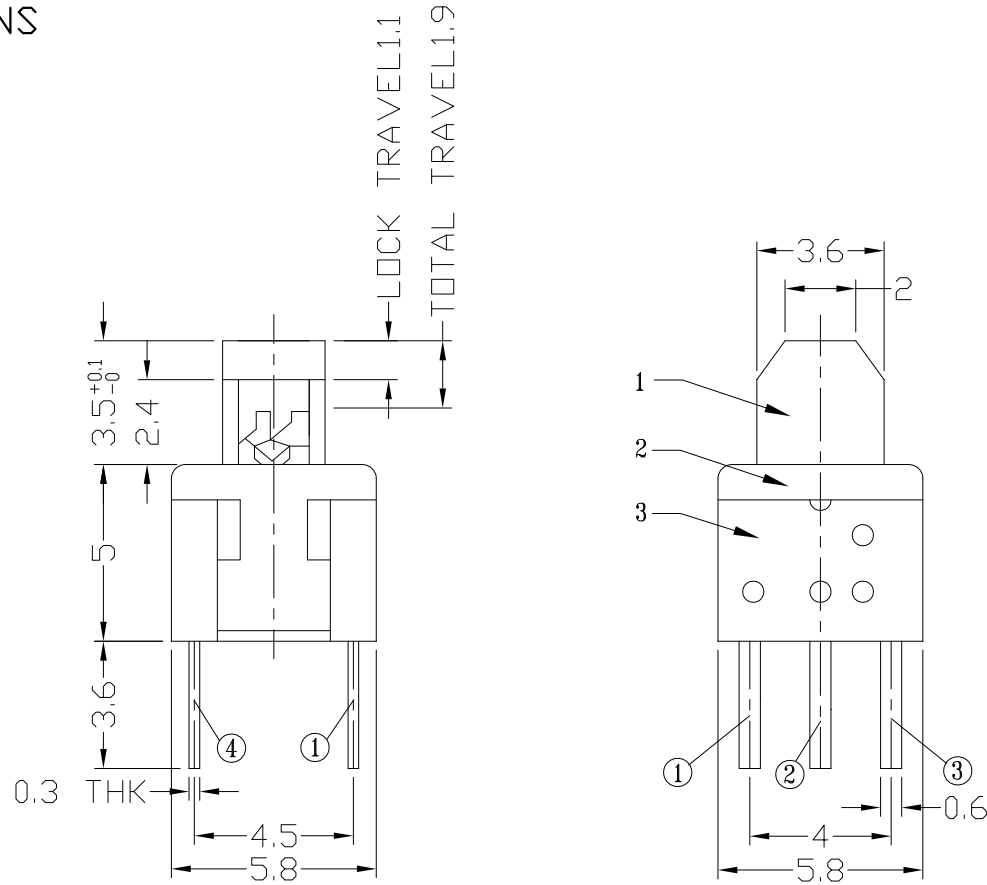

P.C.B LAYOUT



CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC12V 0.1A	
CIRCUIT	2P2T	
CONTACT RESISTANCE	70mΩ MAX.	
TIMING	NON-SHORTING	
OPERATING MODE	SELF-LOCK	AP-2216GL
	NON-LOCK	AP-2216GN
STROKE	FULL 1.9mm	LOCK 1.1mm
OPERATING FORCE	150±50gf	250±100gf
OPERATING LIFE(cycles)	10,000	

NO	PARTS	MATERIAL	QTY	FINISHING	
6					WITHIN 1.5mm: ±0.1mm
5	CAM STICK	SUS	1	NATURAL	OVER 1.5mm: ±0.2mm
4	SPRING	SUS	1	NATURAL	
3	CASE	NYLON+F.G/BRASS STRIP	1	GREY/Ag PLATED OVER Ni PLATED	
2	COVER	POM	1	BLACK	
1	KNOB	POM/PBS C5210R-EH	1	WHITE/Ag CLAD	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	DONGGUAN MINGJU ELECTRONICS CO.,LTD			
mm	TITLE: PUSH SWITCH / VERTICAL		PART NO.: AP-2216GL & AP-2216GN	
MAT'L	DR: <i>Ricky</i> 2015/03/25		DWG NO.: ADJ-2216G	
SEE NOTE	CHKD: <i>Ricky</i> 2015/03/25		SCALE	SHEET
FINISH	APPD:		5:1	1/1
SEE NOTE			REV.	CUSTOMER DRAWING
Q'TY			A	