



DIMENSIONS

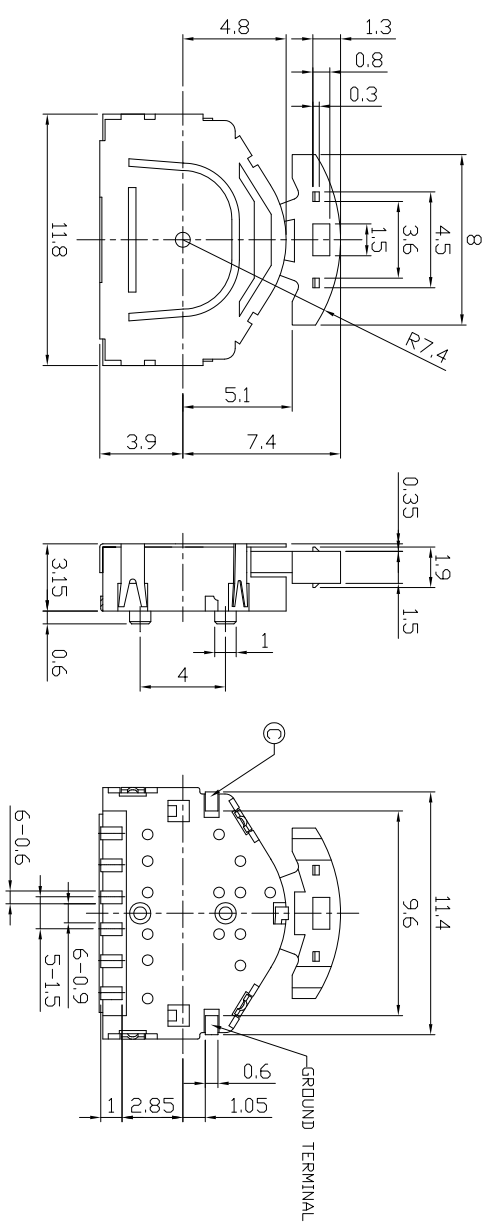

CIRCUIT DIAGRAM




PRODUCT IMAGE



CODE TABLE

Terminal	Angle	CODE TABLE (Hatched)=DN2
①	25°	(215°) (11°)
②	0°	(11°) (215°)
③	25°	(215°)
④	0°	(11°)

P.C.B MOUNTING PATTERN DIMENSION

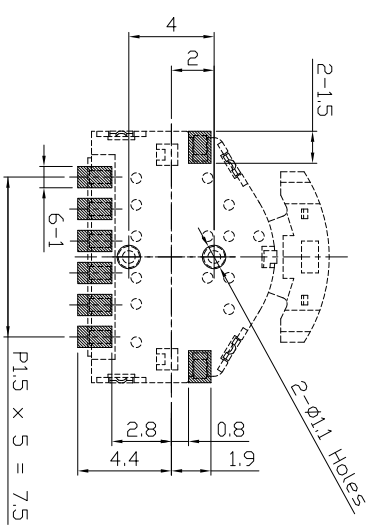

ELECTRO-MECHANICAL CHARACTERISTICS

Rating	DC 5V 10mA
Output Voltage	1V Min. at 5V 1mA
Operating Force	Lever 70±50gf
	Center 200±100gf
Travel	Lever 25°
	Center 0.7mm
Operating Lifecycles)	100,000

The following soldering patterns are recommended for reflow soldering

Refer to additional specifications

UNITS	mm
MAT'L	
SEE NOTE	
FINISH	
SEE NOTE	
Q'TY	

DONGGUAN MINGJU ELECTRONICS CO.,LTD

PART NO.: AL-1512A SERIES

DR: *Stacy* 2014/04/02

CHKD: *Stacy* 2014/04/02

SCALE SHEET 1/1 REV. A CUSTOMER DRAWING

REV.	ECN.	NO.	APPD.