RoHS Compliant 2002/95/EC

Process Capable

REV.	ECN. NO.	APPD.

DIMENSIONS

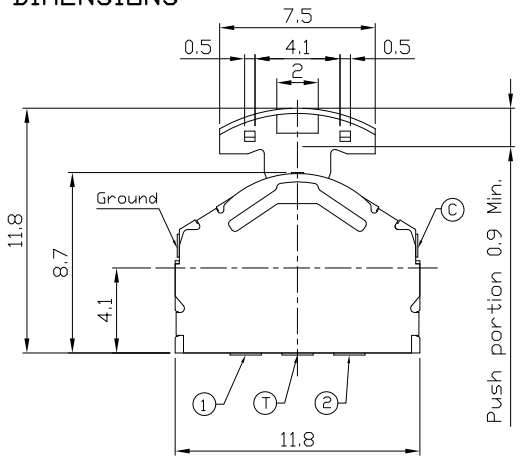

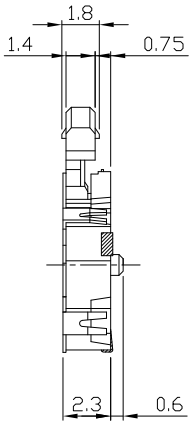

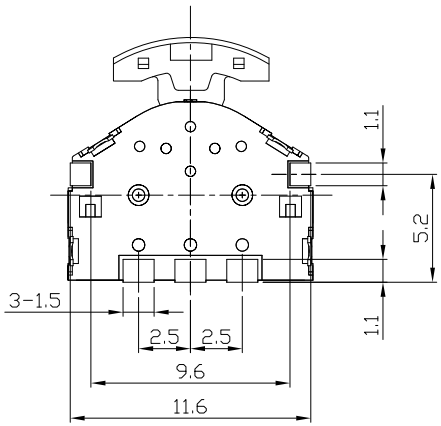

CODE TABLE



PRODUCT IMAGE

CIRCUIT DIAGRAM





P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

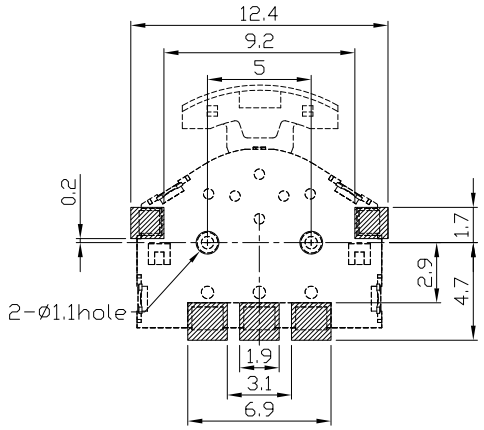

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 5V 10mA	
Output Voltage	1V Min. at 5V 1mA	
Operating Force	Lever	70±50gf
	Center	200±100gf
Travel	Center	0.9mm Min.
Operating Life(cycles)	100,000	

.X ±0.2	X. ±2°
UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

龙创中业电子（深圳）有限公司

TITLE: PUSH LEVER SWITCH	PART NO.: AL-1305A SERIES
DR: Ricky 2014/04/02	DWG NO.: ASI-1305A
CHKD: Ricky 2014/04/02	
APPD:	

SCALE	SHEET	REV.	
1:1	1/1	A	CUSTOMER DRAWING