

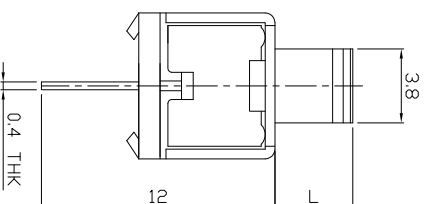
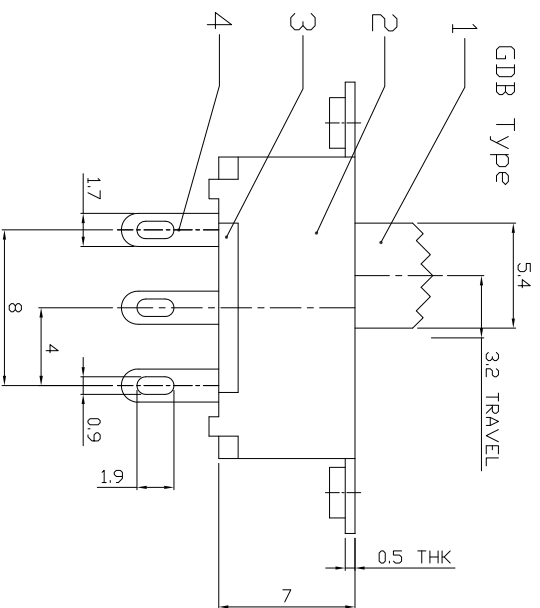
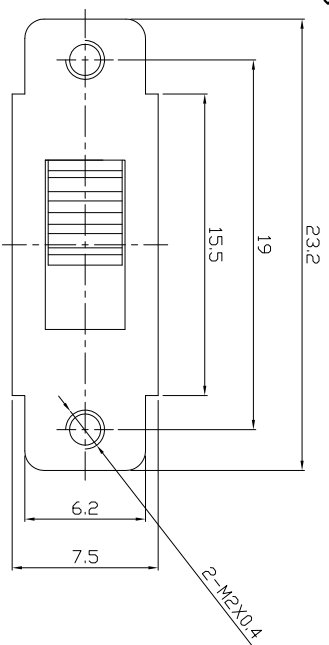



DIMENSIONS



MODEL CODE

SS-12F13-GDB



P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

NO.	PARTS	MATERIAL	Q'TY	FINISHING	UNITS	mm	TITLE:	PART NO.:	DWG NO.:	SCALE	SHEET	REV.	CUSTOMER DRAWING
8					WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm		龙创中业电子（深圳）有限公司	SS-12F13	ADL-12F13	2:1	1/1	A	
7	SPRING	STEEL WIRE	1	NATURAL	SEE NOTE								
6	CONTACT	BRASS STRIP	1	AG PLATED	SEE NOTE								
5	CONTACT	BRASS STRIP	1	AG PLATED	SEE NOTE								
4	TERMINAL	BRASS STRIP	3	AG PLATED	SEE NOTE								
3	BASE	PHENOLIC RESIN	1	NATURAL	SEE NOTE								
2	FRAME	STEEL STRIP	1	BLACK	SEE NOTE								
1	KNOB	POM	1	BLACK	SEE NOTE								
ND.	PARTS	MATERIAL	Q'TY	FINISHING	SEE NOTE								

REV.	ECN.	NO.	APPL.