

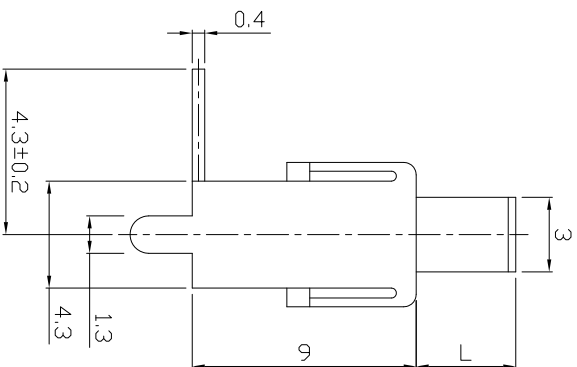
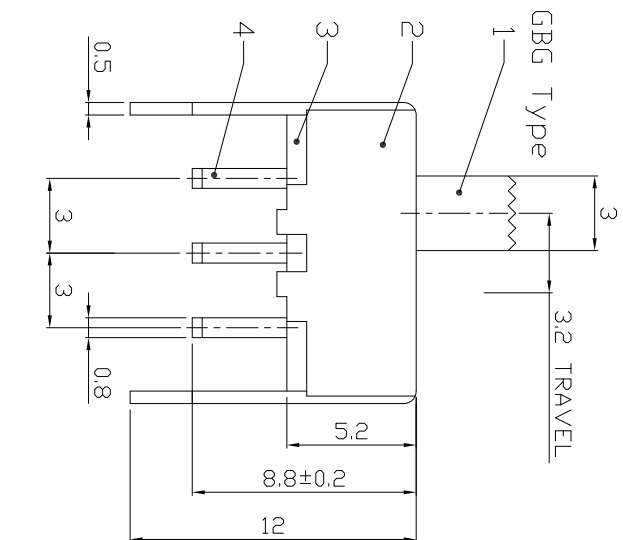

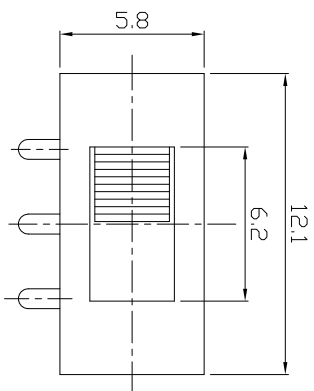



DIMENSIONS



MODEL CODE
SS-12F50-GBG

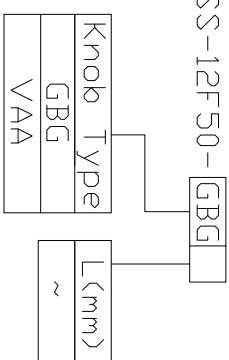

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

8					
7	CONTACT (CLIP)	P.B.S STRIP	1	Ag CLAD	
6	SPRING	STEEL WIRE	1	Ni PLATED	
4	TERMINAL	BRASS STRIP	3	Ag PLATED	
3	TERMINAL BASE	PHENOLIC RESIN	1	NATURAL	
2	FRAME	STEEL STRIP	1	Ni PLATED	
1	KNDB	POM	1	BLACK	
ND.	PARTS	MATERIAL	Q'TY	FINISHING	

WITHIN 1.5mm: ±0.1mm
OVER 1.5mm: ±0.2mm

龙创中业电子（深圳）有限公司

UNITS	mm	TITLE:	SLIDE SWITCH / VERTICAL	PART NO.:	SS-12F50
MAT'L	SEE NOTE	DR:	Rocky 2015/07/13	DWG NO.:	ADL-12F50
FINISH	SEE NOTE	CHK'D:	Rocky 2015/07/13	SCALE	SHEET 1/1
Q'TY		APP'D:		REV.	A
				CUSTOMER DRAWING	

REV.	ECN.	NO.	APPL.