

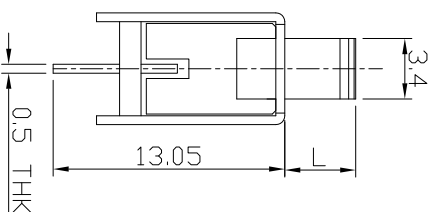


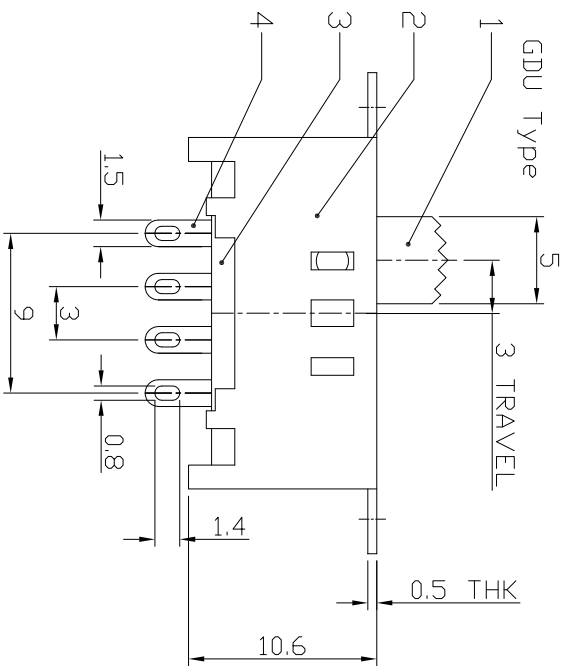



RoHS  
Compliant  
2002/95/EC

DIMENSIONS

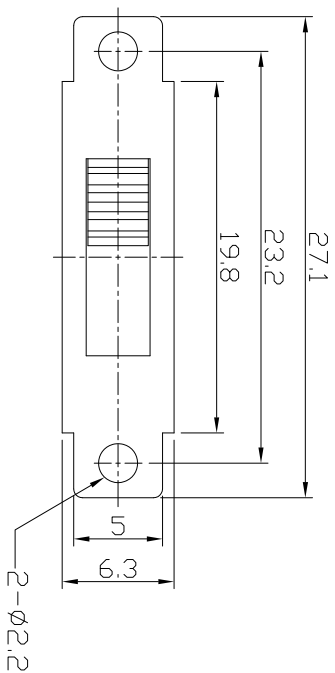

MODEL CODE

SS-13F07-GDU

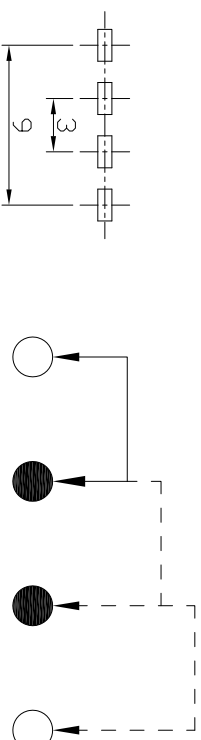

P.C.B LAYOUT  
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	350±100gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	1	NATURAL
7	SPRING	STEEL WIRE	1	NATURAL
6	CONTACT	PBS STRIP	1	AG PLATED
5	CONTACT	PBS STRIP	1	AG PLATED
4	TERMINAL	BRASS STRIP	4	AG PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	FRAME	STEEL STRIP	1	BLACK
1	KNDB	POM	1	BLACK
ND.	PARTS	MATERIAL	Q'TY	FINISHING

WITHIN 1.5mm: ±0.1mm  
OVER 1.5mm: ±0.2mm

龙创中业电子（深圳）有限公司

UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	APP'D:
DR:	2015/07/14
CHK'D:	2015/07/14
PART NO.:	SS-13F07
DWG NO.:	ADL-13F07
SCALE	1/1
SHEET	1/A
REV.	A
CUSTOMER DRAWING	

REV.	ECN.	NO.	APP'D.