

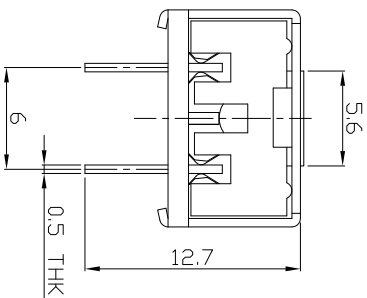
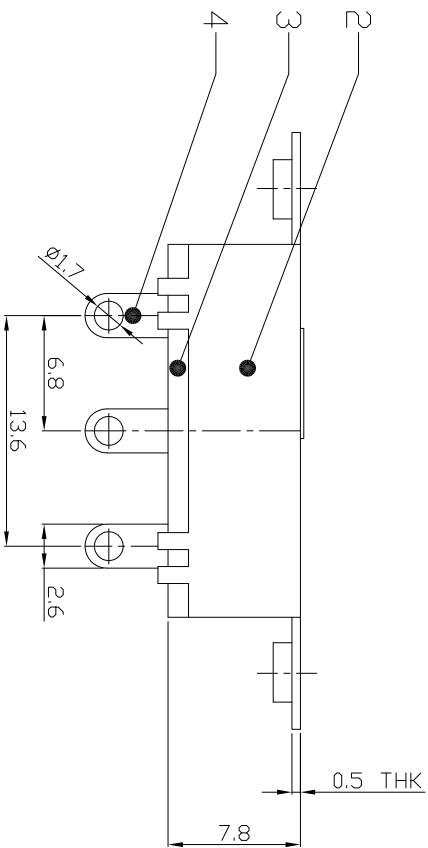
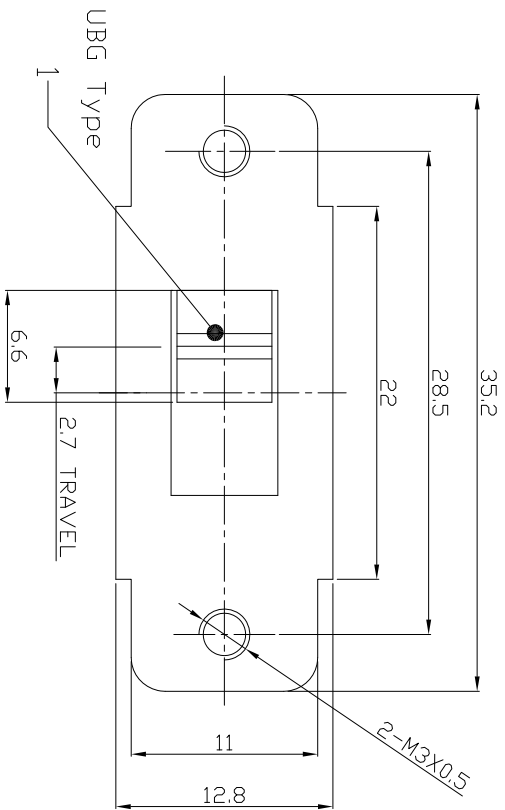


DIMENSIONS

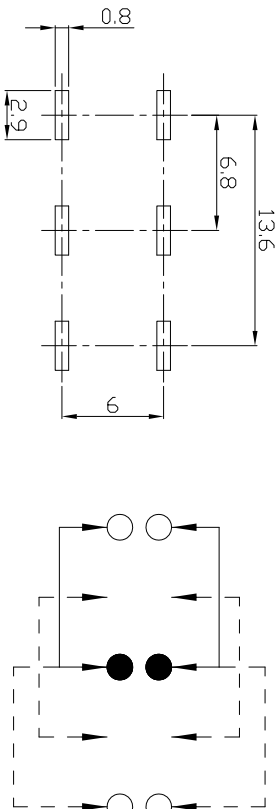

MODEL CODE

SS-23E15-UBG0



P.C.B LAYOUT  
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	3A 250V AC
CIRCUIT	2P3T
CONTACT RESISTANCE	100m $\Omega$ MAX.
TIMING	NON-SHORTING
TRAVEL	2.7mm
OPERATING FORCE	300 $\pm$ 100gf
OPERATING LIFE(cycles)	10,000

8	CONTACT CLIP	PBS STRIP	2	AG PLATED
7	POSITION PLATE	STEEL	1	NI PLATED
6	STEEL BALL	STEEL	1	NATURAL
5	SPRING	STEEL WIRE	1	NATURAL
4	TERMINAL	BRASS STRIP	6	AG PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	FRAME	STEEL STRIP	1	NI PLATED
1	KNDB	POM	1	BLACK
ND.	PARTS	MATERIAL	Q'TY	FINISHING

龙创中业电子（深圳）有限公司

TITLE: SLIDE SWITCH / VERTICAL  
PART NO.: SS-23E15

DR: Ricky 2015/09/08  
CHKD: Ricky 2015/09/08  
SCALE: 1/1  
REV: A  
DWG NO.: ADL-23E15  
CUSTOMER DRAWING

REV.	ECN.	NO.	APPL.