

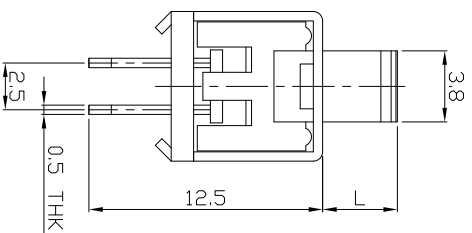
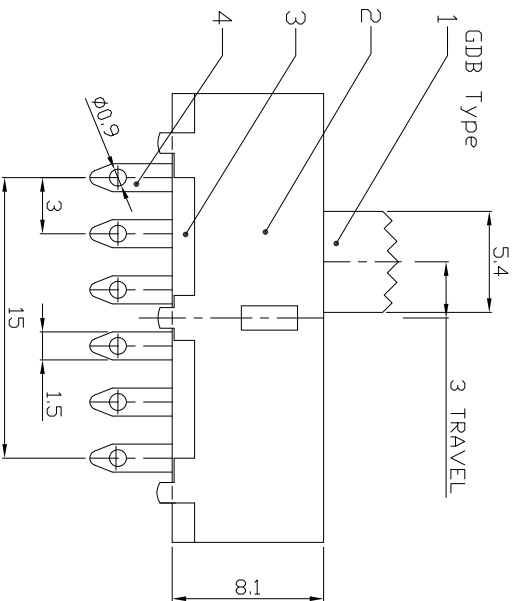
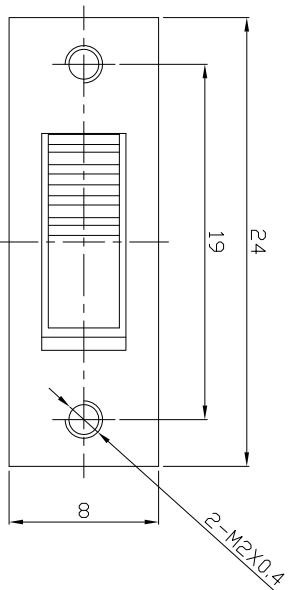



DIMENSIONS

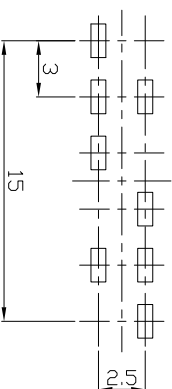

MODEL CODE

SS-23F02-GDB



P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	3mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	2	NATURAL
7	SPRING	STEEL WIRE	3	NATURAL
6	CONTACT	BRASS STRIP	2	Ag PLATED
4	TERMINAL	BRASS STRIP	8	Ag PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	FRAME	STEEL STRIP	1	BLACK
1	KNDB	POM	1	BLACK
ND.	PARTS	MATERIAL	Q'TY	FINISHING

WITHIN 1.5mm: ±0.1mm
OVER 1.5mm: ±0.2mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED, PRINTED, WRITTEN OR OTHERWISE TRANSMITTED WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	APP'D:
DR:	2015/05/29
CHK'D:	2015/05/29
PART NO.:	SS-23F02
DWG NO.:	ADL-23F02
SCALE	1/1
SHEET	1/A
REV.	A
CUSTOMER DRAWING	

龙创中业电子（深圳）有限公司

REV.	ECN.	NO.	APPL.