

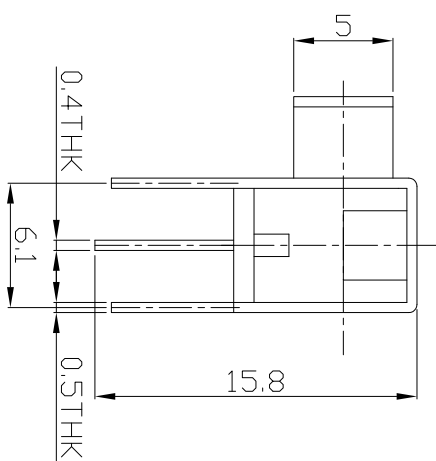
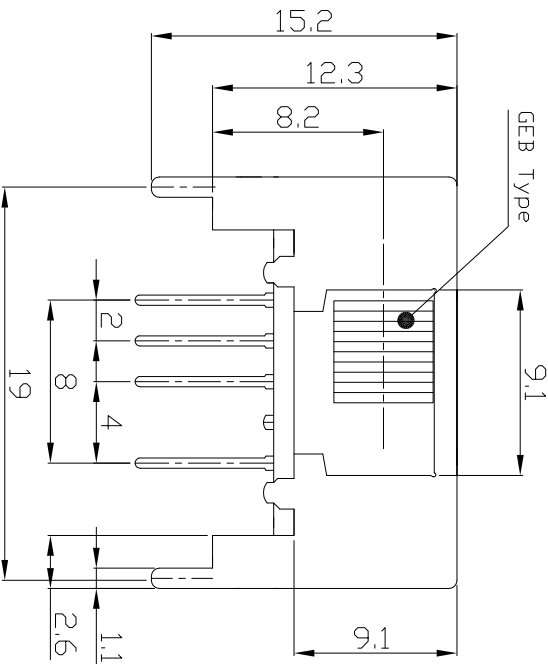
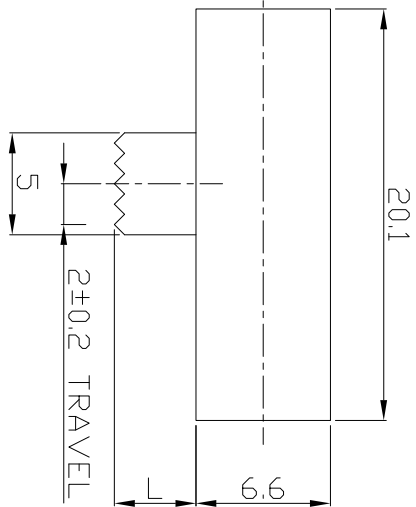


DIMENSIONS

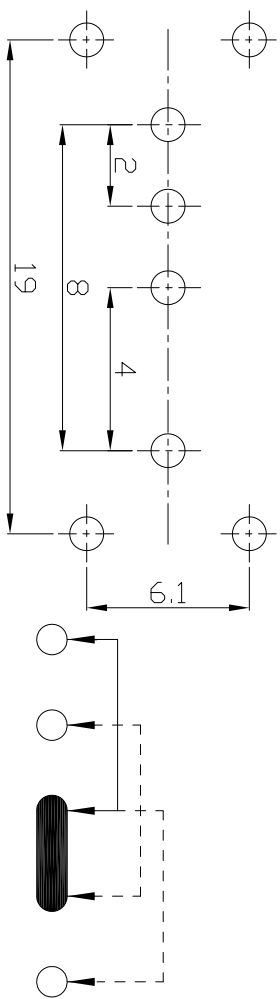

MODEL CODE

SK-13D18-GEB



P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2±0.2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	1	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	mm
7	SPRING	STEEL WIRE	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE
6	CONTACT	BRASS	2	Ag PLATED		FINISH	SEE NOTE
5	CONTACT	BRASS	2	Ag PLATED		FINISH	SEE NOTE
4	TERMINAL	BRASS STRIP	6	Ag PLATED		FINISH	SEE NOTE
3	BASE	PHENOLIC RESIN	1	BLACK		FINISH	SEE NOTE
2	KNOB	PA66	1	BLACK		FINISH	SEE NOTE
1	FRAME	STEEL STRIP	1	Ni PLATED		FINISH	SEE NOTE
ND.	PARTS	MATERIAL	Q'TY	FINISHING		APP'D	

龙创中业电子（深圳）有限公司

TITLE: SLIDE SWITCH / HORIZONTAL
PART NO.: SK-13D18

DR: Ricky 2016/02/18
CHKD: Ricky 2016/02/18
DWG NO.: ADL-13D18

SCALE: 1/1
SHEET: 5/2
REV: A
CUSTOMER DRAWING

REV.	ECN.	NO.	APPD.