

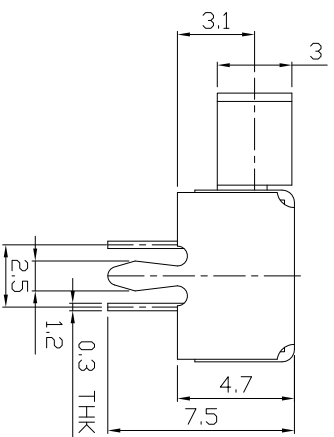




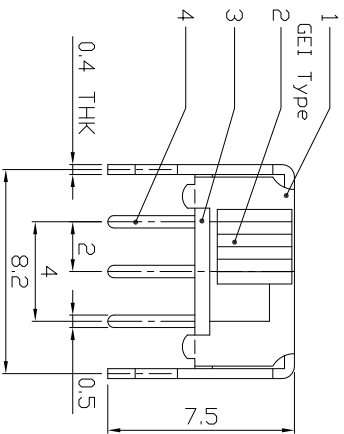
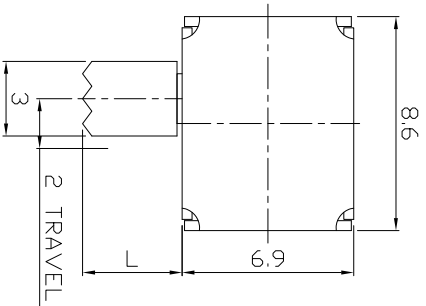



DIMENSIONS



MODEL CODE

SK-22D03-GEI

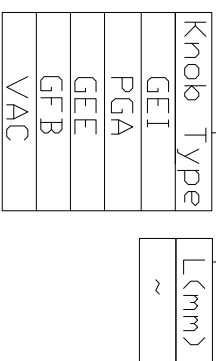

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NO SHORTING
TRAVEL	2mm
OPERATING FORCE	300±100gf
OPERATING LIFE(cycles)	10,000

8					
7	SPRING PLATE	PBS STRIP	1	NATURAL	
6	CONTACT CLIP	PBS STRIP	2	AG PLATED	
4	TERMINAL	BRASS STRIP	6	AG PLATED	
3	BASE	PHENOLIC RESIN	1	NATURAL	
2	KNOB	POM	1	BLACK	
1	FRAME	STEEL STRIP	1	Ni PLATED	
ND.	PARTS	MATERIAL	Q'TY	FINISHING	

WITHIN 1.5mm: ±0.1mm
OVER 1.5mm: ±0.2mm

龙创中业电子(深圳)有限公司

TITLE:	SLIDE SWITCH / HORIZONTAL	PART NO.:	SK-22D03
DR:	Rocky 2016/06/24	DWG NO.:	ADL-22D03
CHKD:	Rocky 2016/06/24	SCALE:	SHEET 1/1
APPD:		REV.:	A
			CUSTOMER DRAWING

REV.	ECN.	NO.	APPL.