

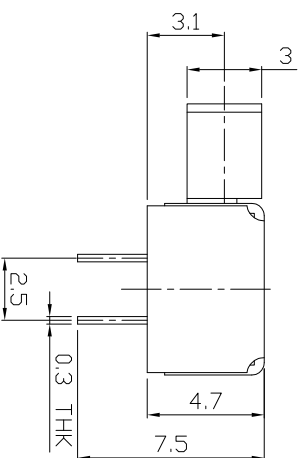
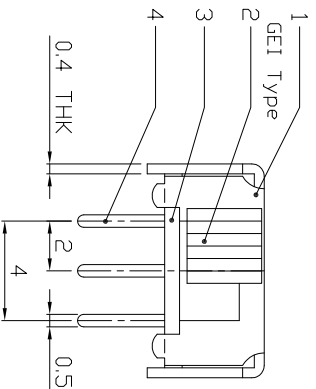




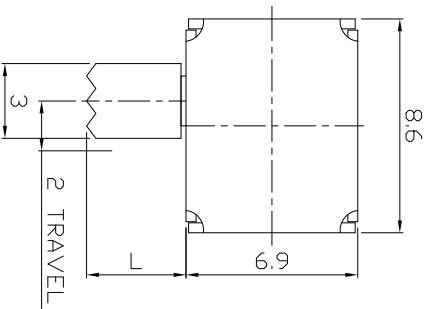



DIMENSIONS



MODEL CODE

SK-22D09-GEI

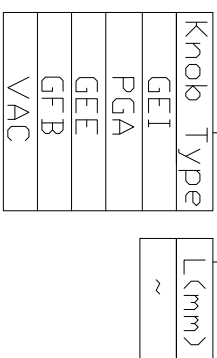

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8																			
7																			
6	SPRING PLATE	PBS STRIP	1	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	mm												
5	CONTACT CLIP	PBS STRIP	2	AG PLATED	OVER 1.5mm: ±0.2mm	MAT'L		SEE NOTE											
4	TERMINAL	BRASS STRIP	6	AG PLATED		FINISH		SEE NOTE											
3	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE													
2	KNOB	POM	1	BLACK		Q'TY													
1	FRAME	STEEL STRIP	1	Ni PLATED		APP'D:													
ND.	PARTS	MATERIAL	Q'TY	FINISHING															

龙创中业电子（深圳）有限公司

TITLE: SLIDE SWITCH / HORIZONTAL
PART NO.: SK-22D09

DR: 2016/06/24
CHKD: 2016/06/24
SCALE: 4:1

REV. 1/1
CUSTOMER DRAWING