

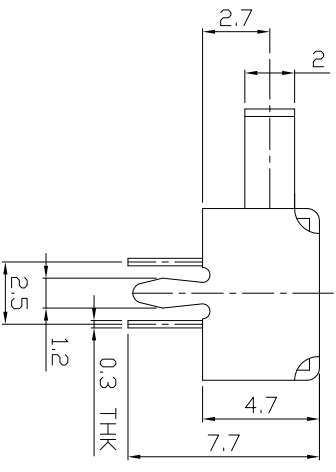
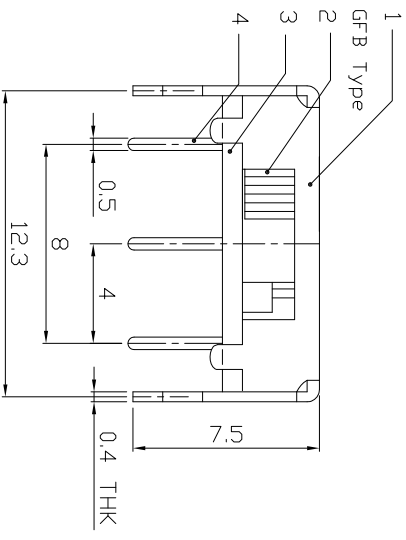

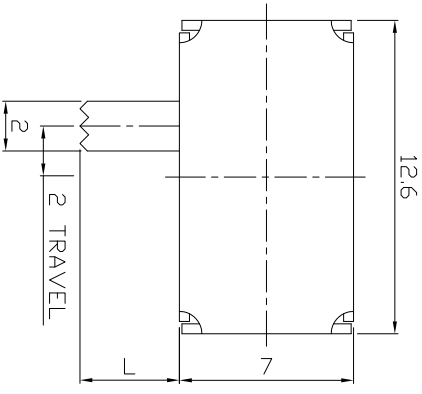



DIMENSIONS

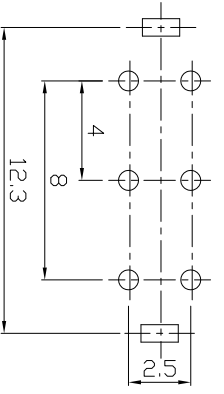

MODEL CODE

SK-22H07-GFB

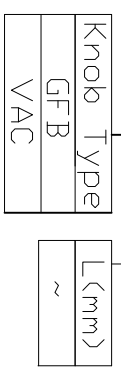

**P.C.B LAYOUT
BOTTOM VIEW**

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	300±100gf
OPERATING LIFE(cycles)	10,000

8																			
7	SPRING PLATE	PBS STRIP	1	NATURAL	WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS	mm												
6	CONTACT CLIP	PBS STRIP	2	AG PLATED		MAT'L	SEE NOTE												
5	TERMINAL	BRASS STRIP	6	AG PLATED		FINISH	SEE NOTE												
4	BASE	PHENOLIC RESIN	1	NATURAL		DR:	2016/06/21												
3	FRAME	STEEL STRIP	1	NI PLATED	CHKD:	2016/06/21													
2	KNDB	POM	1	BLACK	Q'TY	1													
1	PARTS	MATERIAL	Q'TY	FINISHING	APPLD:														

龙创中业电子（深圳）有限公司

TITLE: SLIDE SWITCH / HORIZONTAL
PART NO.: SK-22H07

DWG NO.: ADL-22H07
SCALE: 1/1

REV. 1/1
CUSTOMER DRAWING

REV.	ECN.	NO.	APPL.