

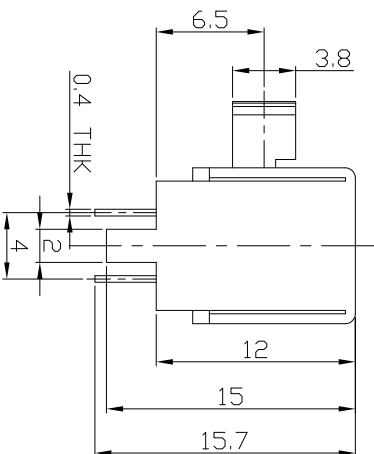
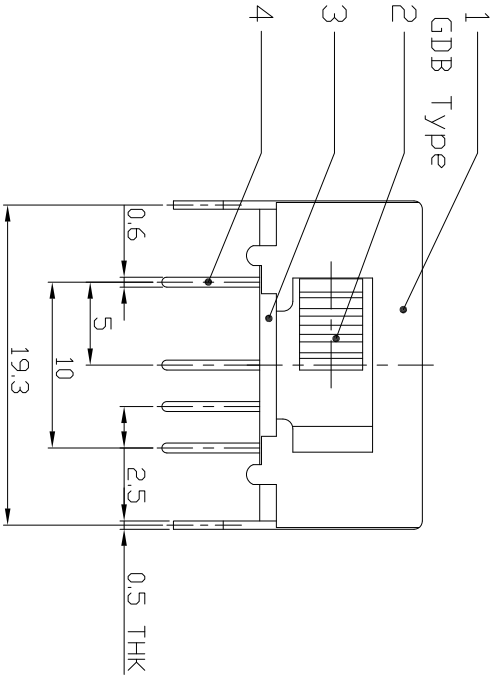
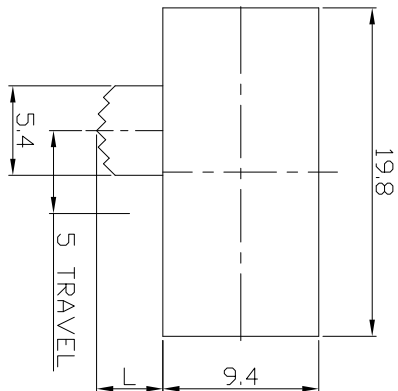


DIMENSIONS

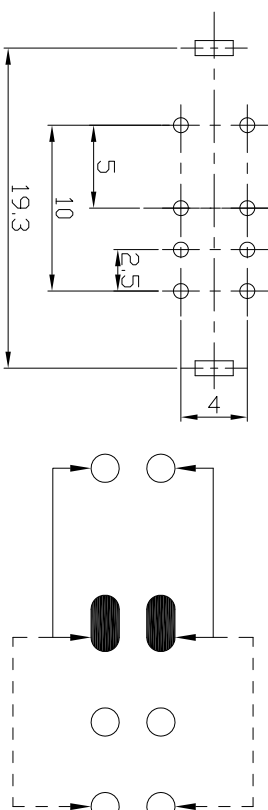

MODEL CODE

SK-22J01-GDB



P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	5mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	1	NATURAL
7	SPRING	STEEL WIRE	1	NATURAL
6	CONTACT CLIP	PBS STRIP	2	Ag PLATED
5	TERMINAL	BRASS STRIP	8	Ag PLATED
4	BASE	PHENOLIC RESIN	1	NATURAL
3	KNOB	POM	1	BLACK
2	FRAME	STEEL STRIP	1	Ni PLATED
1	PARTS	MATERIAL	Q'TY	FINISHING

WITHIN 1.5mm: ±0.1mm
OVER 1.5mm: ±0.2mm

龙创中业电子 (深圳) 有限公司

UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	APP'D
TITLE:	SLIDE SWITCH / HORIZONTAL
DR:	2016/06/28
CHK'D:	2016/06/28
SCALE	1/1
SHEET	1/A
PART NO.:	SK-22J01
DWG NO.:	ADL-22J01
CUSTOMER DRAWING	

REV.	ECN.	NO.	APPL.