


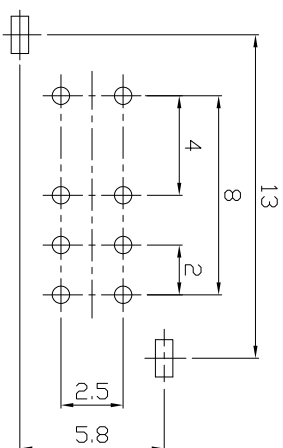



DIMENSIONS

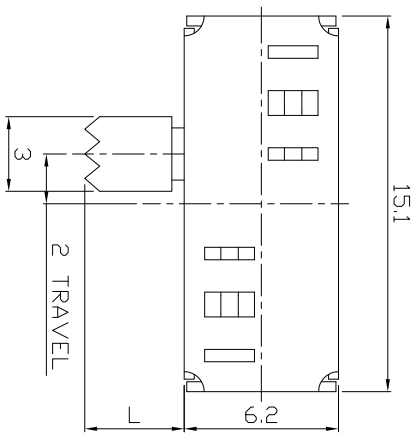

MODEL CODE

SK-23D26-GEI





P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

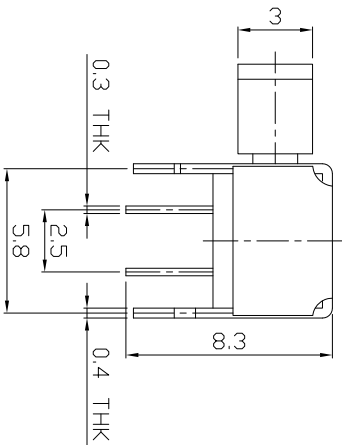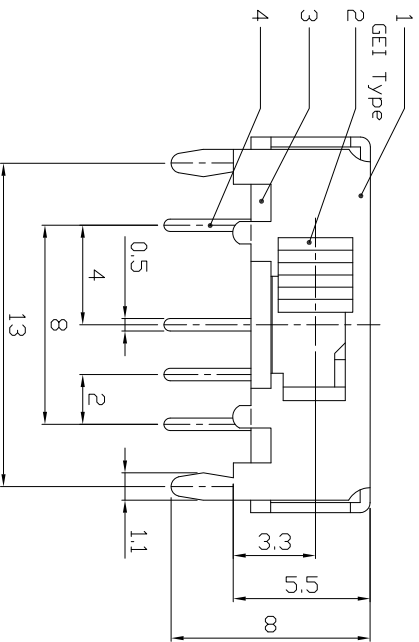

8																			
7	SPRING PLATE	SUS	1	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	mm												
6	CONTACT CLIP	PBS STRIP	2	AG PLATED	OVER 1.5mm: ±0.2mm	MAT'L		SEE NOTE											
5	TERMINAL	BRASS STRIP	8	AG PLATED		FINISH		SEE NOTE											
4	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE													
3	KNOB	POM	1	BLACK		Q'TY	1												
2	FRAME	STEEL STRIP	1	Ni PLATED		Q'TY	1												
1	PARTS	MATERIAL	Q'TY	FINISHING		APPLD													

龙创中业电子(深圳)有限公司

TITLE: SLIDE SWITCH / HORIZONTAL
PART NO.: SK-23D26

DR: 2016/07/11
CHKD: 2016/07/11
SCALE: 1/1

REV. ECN. NO. APPLD.
CUSTOMER DRAWING