
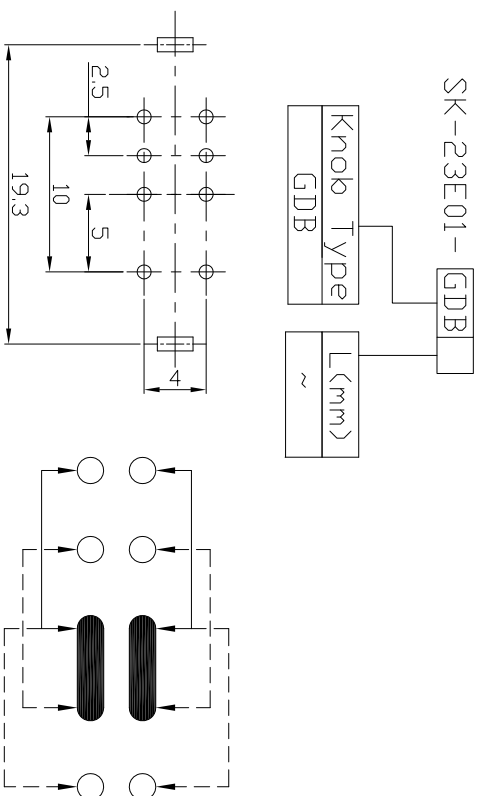
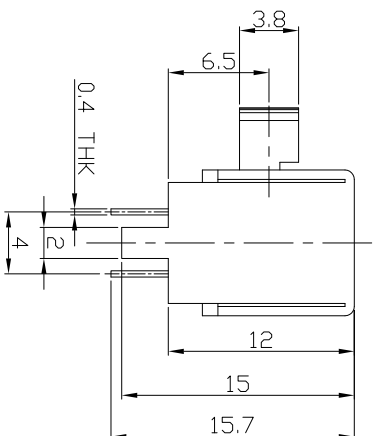
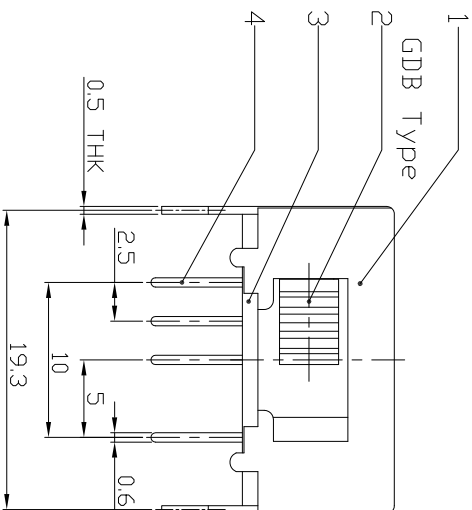


DIMENSIONS

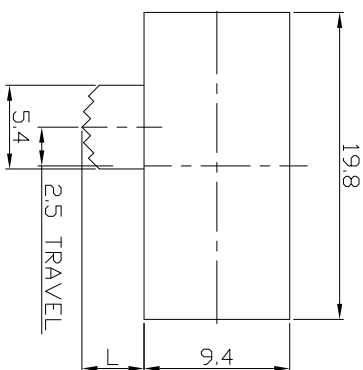

P.C.B LAYOUT  
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS  
Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2.5mm
OPERATING FORCE	300±100gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	1	NATURAL	WITHIN 1.5mm: ±0.1mm
7	SPRING	STEEL WIRE	1	NATURAL	OVER 1.5mm: ±0.2mm
6	CONTACT CLIP	PBS C5210R-EH	2	AG PLATED	
5	TERMINAL	BRASS STRIP	8	AG PLATED	
4	BASE	PHENOLIC RESIN	1	NATURAL	
3	KNOB	POM	1	BLACK	
2	FRAME	STEEL STRIP	1	Ni PLATED	
1	PARTS	MATERIAL	Q'TY	FINISHING	

UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	
APPLD	

龙创中业电子（深圳）有限公司

TITLE: 龙创中业电子（深圳）有限公司  
SLIDE SWITCH / HORIZONTAL  
PART NO.: SK-23E01

DR: Ricky 2016/07/13  
CHKD: Ricky 2016/07/13  
DWG NO.: ADL-23E01

SCALE: 2:1  
SHEET: 1/1  
REV: A  
CUSTOMER DRAWING

REV.	ECN.	NO.	APPL.