


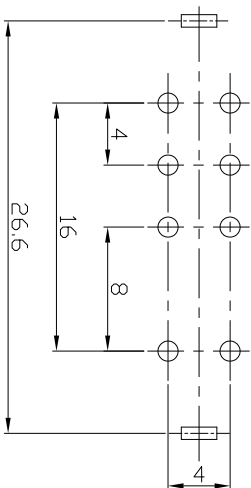
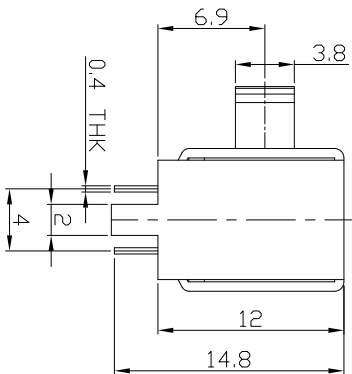


DIMENSIONS

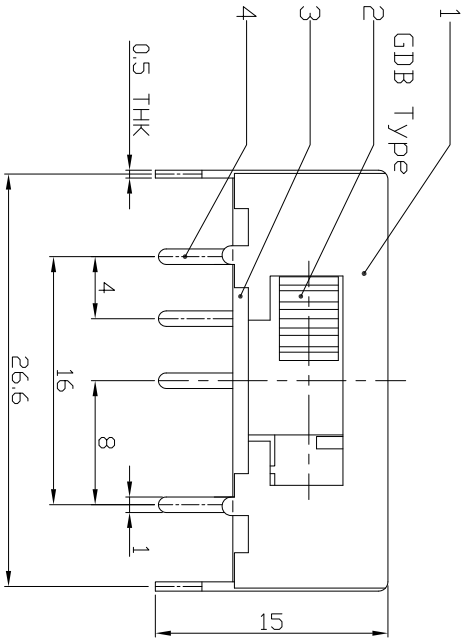

MODEL CODE

SK-23H01-GDB

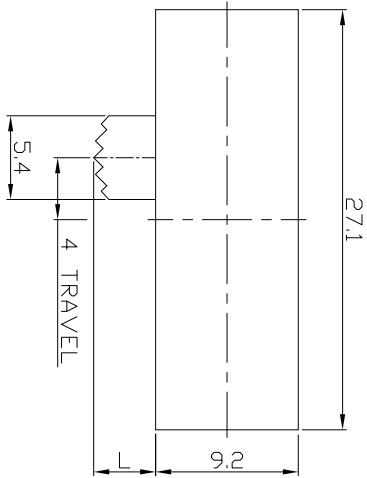

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	4mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8	CONTACT CLIP	PBS STRIP	2	AG PLATED
7	SPRING	STEEL WIRE	1	NATURAL
6	STEEL BALL	STEEL	1	NATURAL
4	TERMINAL	BRASS STRIP	8	AG PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	KNOB	POM	1	BLACK
1	FRAME	STEEL STRIP	1	Ni PLATED
ND.	PARTS	MATERIAL	Q'TY	FINISHING

WITHIN 1.5mm: ±0.1mm
OVER 1.5mm: ±0.2mm

龙创中业电子（深圳）有限公司

TITLE: SLIDE SWITCH / HORIZONTAL
PART NO.: SK-23H01

DR: Ricky 2016/07/13
CHKD: Ricky 2016/07/13
SCALE: 1/1

DWG NO.: ADL-23H01
REV. A
CUSTOMER DRAWING

REV.	ECN.	NO.	APPL.