

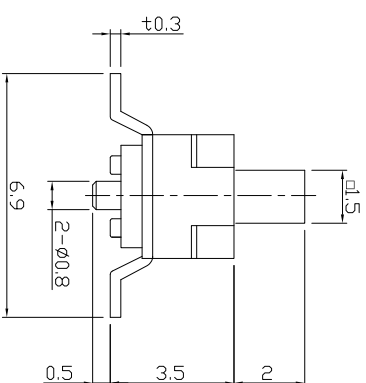


DIMENSIONS

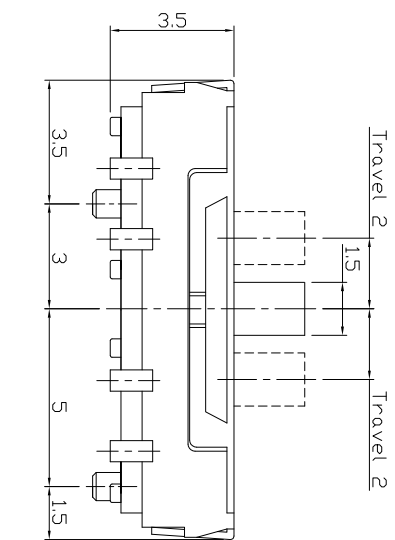

AS-2336S □-□

| | | |
|---|------|------------|
| L | (mm) | Knob Color |
| - | 2.0 | B Black |
| | | W White |

CIRCUIT DIAGRAM



PRODUCT IMAGE

MODEL CODE

| | | | |
|------|------|-----|-------|
| REV. | ECN. | NO. | APPD. |
| | | | |
| | | | |

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

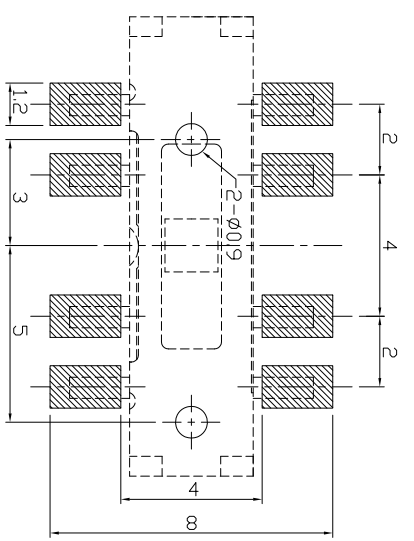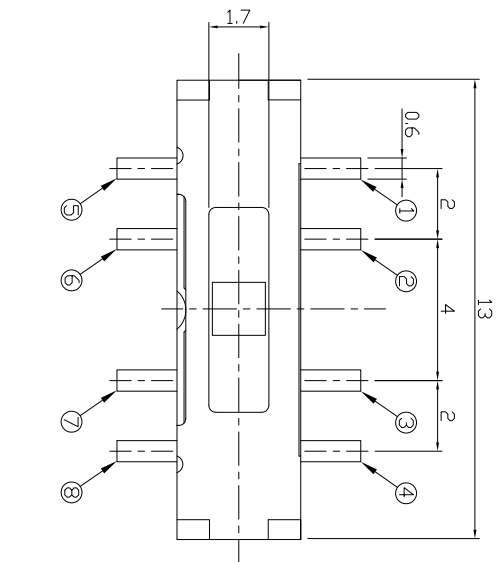

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

| | |
|------------------------|-------------|
| Rating | DC 6V 0.3A |
| Circuit | 2C-3P |
| Contact Resistance | 70mΩ Max. |
| Travel | 2.0 ± 0.3mm |
| Operating Force | 250±100gf |
| Operating Life(cycles) | 10,000 |

龙创中业电子（深圳）有限公司

TITLE: MINI SLIDE SWITCH
PART NO.: AS-2336S SERIES

DR: *Rocky* 2014/04/03
CHKD: *Rocky* 2014/04/03
APPD:
DWG NO.: ASI-2336S
SCALE: 1:1
SHEET: 1/1
REV. A
CUSTOMER DRAWING

| | |
|--------|----------|
| UNITS | mm |
| MAT'L | SEE NOTE |
| FINISH | SEE NOTE |
| Q'TY | SEE NOTE |
| APPRO. | SEE NOTE |

X. ±0.2 X. ±2'

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.