Pb Process Capable

RoHS Compliant 2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

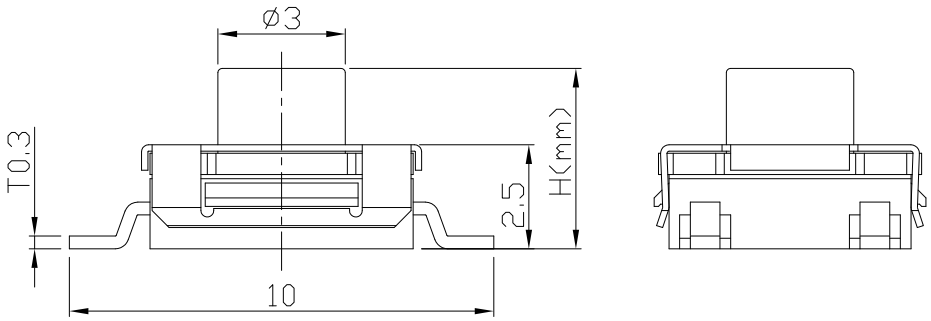

CIRCUIT DIAGRAM



PRODUCT IMAGE



MODEL CODE

AT-1158S-

H	
–	3.4
A	4.0
B	4.3
C	5.0

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

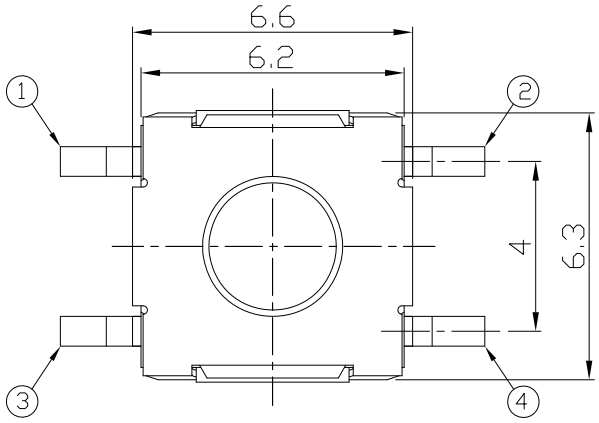

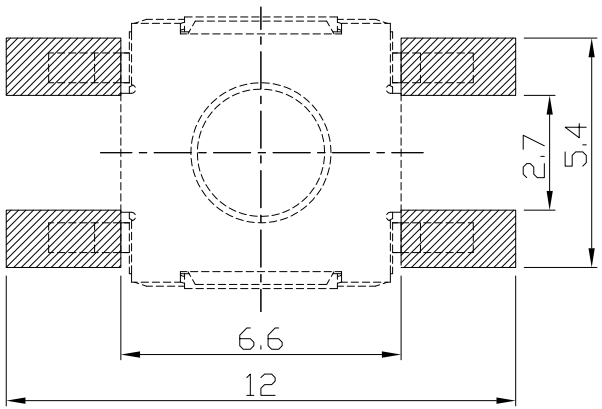

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.3 ± 0.2mm	
Operating Force	160±50gf	260±50gf
Operating Life(cycles)	100,000	

.X ±0.3	X. ±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS mm

MAT'L SEE NOTE

FINISH SEE NOTE

Q'TY

龙创中业电子（深圳）有限公司

TITLE: TACT SWITCH

PART NO.: AT-1158S SERIES

DR: Ricky 2017/04/06

DWG NO.: ASI-1158S

CHKD: Ricky 2017/04/06

APPD:

SCALE	SHEET	REV.	
1:1	1/1	A	CUSTOMER DRAWING