

产品名称:(1.25)立式贴片连接器

间距:1.25mm



备注:

1. 电气性能:

1-1. 额定流: 1.0A (AWG. #30)





1-2. 额定电压: 125V

1-3. 耐电压: 250V

1-4. 接触电阻: 20mΩ

1-5. 绝缘电阻: 1000mΩ

2. 工作温度: -25℃~+85℃

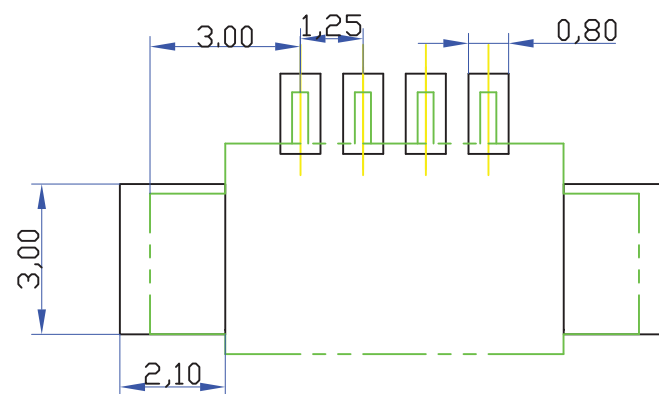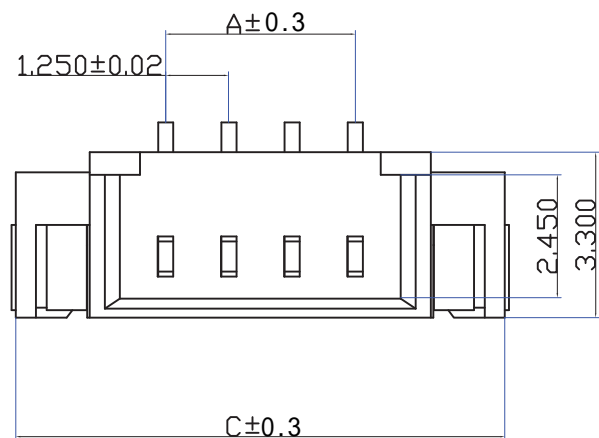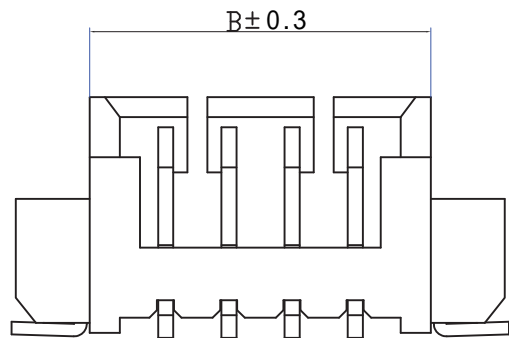


1.25立式贴片	A-(mm)	B-(mm)	C-(mm)
1.25LT-2P	1.25mm	4.30mm	7.00mm
1.25LT-3P	2.50mm	5.55mm	8.25mm
1.25LT-4P	3.75mm	6.80mm	9.50mm
1.25LT-5P	5.00mm	8.05mm	10.75mm
1.25LT-6P	6.25mm	9.30mm	12.00mm
1.25LT-7P	7.50mm	10.55mm	13.25mm
1.25LT-8P	8.75mm	11.80mm	14.50mm
1.25LT-9P	10.00mm	13.05mm	15.75mm
1.25LT-10P	11.25mm	14.30mm	17.00mm
1.25LT-11P	12.50mm	15.55mm	18.25mm
1.25LT-12P	13.75mm	16.80mm	19.50mm
1.25LT-13P	15.00mm	18.05mm	20.75mm
1.25LT-14P	16.25mm	19.30mm	22.00mm
1.25LT-15P	17.50mm	20.55mm	23.25mm
1.25LT-16P	18.75mm	21.80mm	24.50mm
1.25LT-17P	20.00mm	23.05mm	25.75mm
1.25LT-18P	21.25mm	24.30mm	17.00mm
1.25LT-19P	22.50mm	25.55mm	28.25mm
1.25LT-20P	23.75mm	26.80mm	29.50mm

工艺要求

电镀: PIN针黄铜镀锡80u 焊片: 黄铜镀锡80u
 耐热性: 适合嵌合状态; 85±2℃的空气中; 放置96小时; 再回到室温中放置1-2小时85±2℃, 96小时外观无损伤

耐盐雾性: 适合嵌合状态; 35±2℃、5±1%的盐水喷雾24小时; 试验后常温水洗; 再室温干燥。外观无损坏, 无腐蚀;

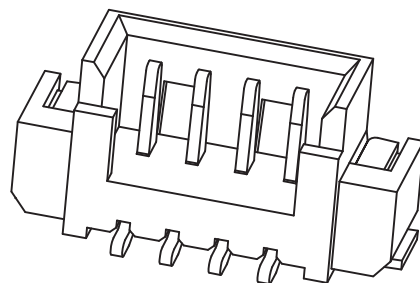

>20	±0.25
>10≤20	±0.2
>3≤10	±0.15
≤3	±0.10
尺寸范围	公差
未注公差	

序号	材料名称	数量	材质	产地	镀涂	REMARK
①	插针	n	黄铜	中国	镍底, 镀锡	GP PASS
②	基座	1	LCP宝理E47Li无卤	日本	UL 94V-0	GP PASS
③	焊片	2	黄铜	中国	镍底, 镀锡	GP PASS

乐清乐亿制品