

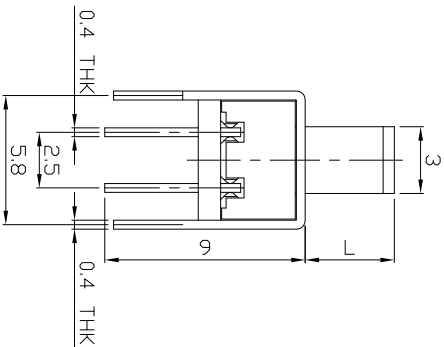
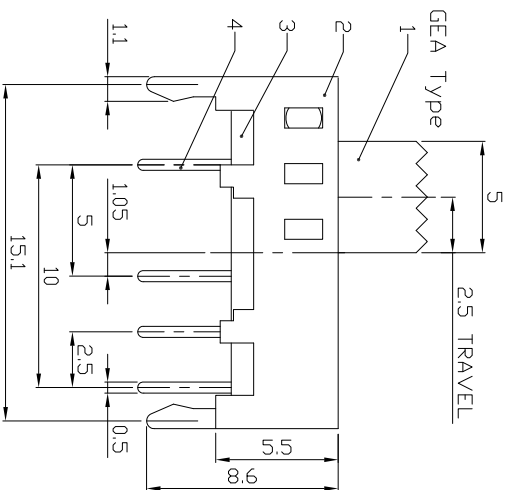
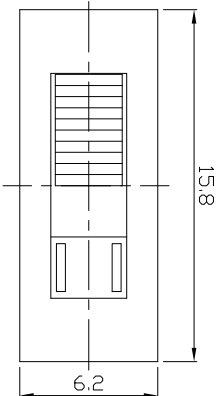



DIMENSIONS

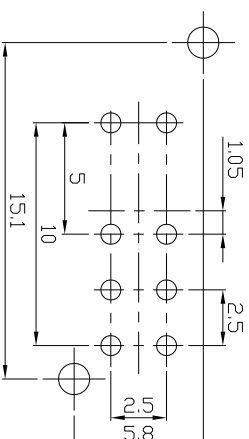

MODEL CODE

SS-23E05-GEA

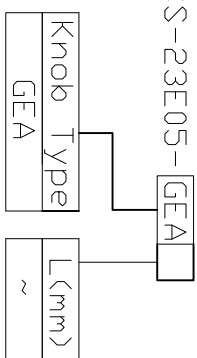

P.C.B LAYOUT  
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2.5mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

龙创中业电子（深圳）有限公司

TITLE: SLIDE SWITCH / VERTICAL


PART NO.: SS-23E05

DR: Ricky 2015/05/29

CHKD: Ricky 2015/05/29

APPD:

WITHIN 1.5mm: ±0.1mm	UNITS mm
OVER 1.5mm: ±0.2mm	MAT'L
	SEE NOTE
	FINISH
	SEE NOTE
	Q'TY
	APPD:



DWG NO: ADL-23E05	SCALE 4:1	SHEET 1/1	REV. A	CUSTOMER DRAWING
-------------------	-----------	-----------	--------	------------------

8	STEEL BALL	STEEL	2	NATURAL
7	SPRING	STEEL WIRE	1	NATURAL
6	CONTACT CLIP	PBS STRIP	2	AG PLATED
5	TERMINAL	BRASS STRIP	8	AG PLATED
4	BASE	PHENOLIC RESIN	1	NATURAL
3	FRAME	STEEL STRIP	1	N PLATED
2	KNOB	POM	1	BLACK
1	PARTS	MATERIAL	Q'TY	FINISHING

1	2	3	4	5	6	7
---	---	---	---	---	---	---